






HYDRONIC M-II TECHNICAL DATA

HYDRONIC M-II COOLANT HEATER


This series of heaters is powerful, compact, and light weight while still being rugged in design. This makes it ideal for providing engine, fuel, and hydraulic preheat for off-road equipment. It is also ideal for providing both engine and supplemental cabin heat for buses and boats.

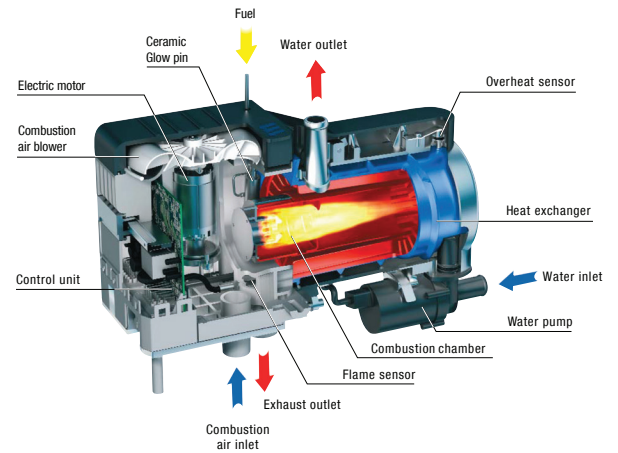

HYDRONIC M8 (BIODIESEL)



HYDRONIC M10



HYDRONIC M12

COOLANT HEATERS	HYDRONIC M8 (BIODIESEL)	HYDRONIC M10	HYDRONIC M12
Heat Output (kW/BTU)	1.5 / 5120 8.0 / 27300	1.5 / 5120 9.5 / 32437	1.2 / 4100 12 / 42000
Fuel Consumption (l/hr / US gal/hr)	0.90 / 0.24 0.18 / 0.05	1.2 / 0.32 0.18 / 0.05	1.5 / 0.40 0.15 / 0.04
Electrical Consumption (amps) (12V shown, 12V or 24V available)	2.9 - 4.6	2.9 - 7.2	2.8 - 11.0
Weight (kg/lbs)	6.2 / 13.7	6.2 / 13.7	6.2 / 13.7